


Technical Data Sheet

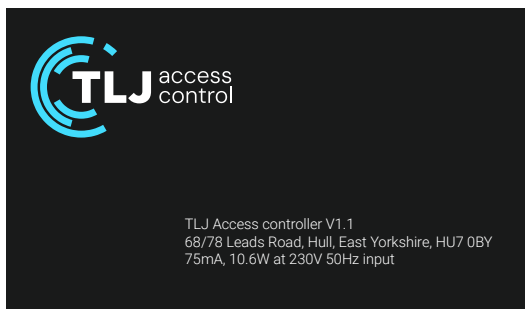

372mm

Controller cabinet
(lockable)


262mm

74.5mm




127mm

Wall mounted
reader




Power	Controller: 230-240V50Hz Reader: 12V DC 0.3Amp
Material	Zink Alloy & Polycarbonate Mild Steel, powder coated
Metal Finishes	Polished Chrome (PC)
Battery location	Mains powered, with 12V back up in controller
Mounting	Surface mount, reader includes bracket
Operating Temp	-20°C to 70°C
Certifications	EMC, R&TTE & LVD Directives CE Marked
Rating	IP55

Technical Data Sheet

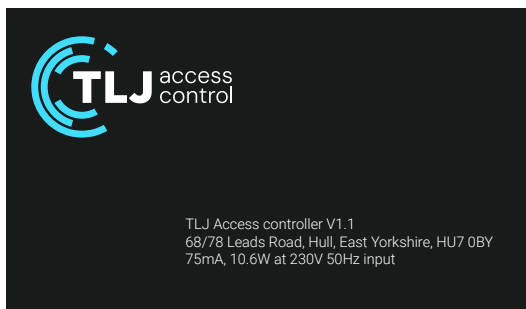

372mm

262mm

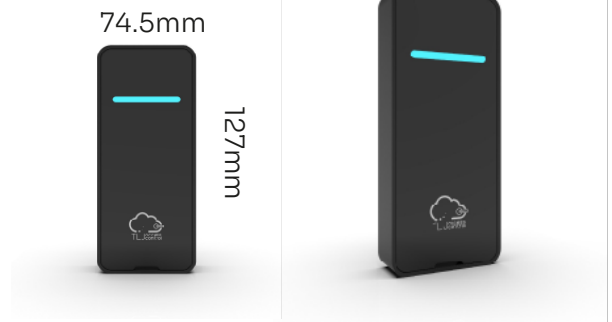

Wall mounted reader

Controller cabinet
(lockable)

Power	Controller: 230-240V50Hz Reader: 12V DC 0.3Amp
Material	HDPE (High - Density Polyethylene)
Battery location	Mains powered, with 12V back up in controller
Mounting	Surface mount, reader includes bracket
Operating Temp	-20°C to 70°C
Certifications	EMC, R&TTE & LVD Directives CE Marked
Rating	IP55